


# REG 3



*photo: white with grey ring, straight cable*

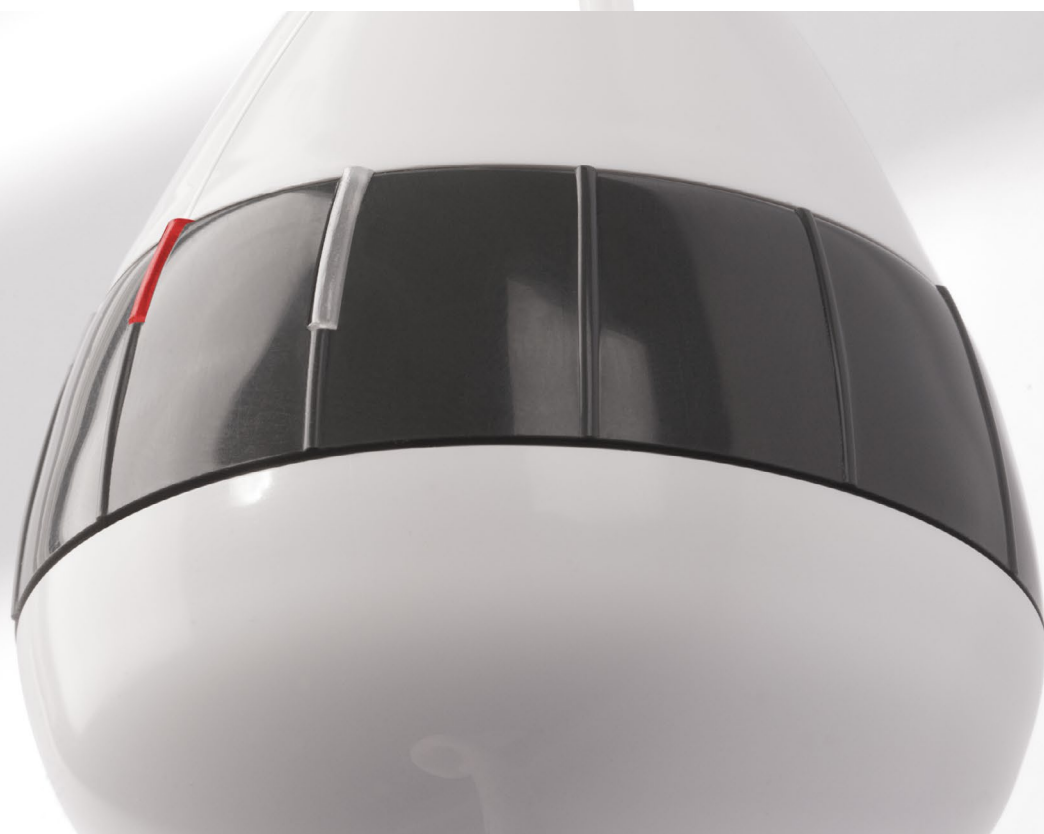

## Functions and features:

### Functionality

REG 3 offers two temperature settings of 50°C and 65°C. It features a bimetallic thermal cutout. The device displays currently set temperature level.

### Intelligent Building Systems

In the event of a power failure the REG 3 remembers it's previous settings therefore making it suitable for connection to external timers and intelligent building systems.

### Safety

REG3 is equipped with double protection against overheating of the radiator.

### Design

REG 3 has small controller housing in a universal shape reminiscent of a drop of water. Control is via a rotating ring shaped switch that turns the heating element on and off and allows the selection of temperature settings.

### Colour

Available colours: white, silver, chrome and black. Heating element can also be offered in any RAL colour and Terma special colours (including brass and gold) subject to a minimum order of 100pcs per colour.

## Specifications:

Power supply:	230 V AC
Device protection class:	Class I
Radiator connection:	G 1/2"
Ingress protection [IP]:	IPx5

## Table configurations:


Example of product code: **WE**R3**G**0**4** **T**S**MA**W

Element power code  
Colour or finish code  
Cable type and plug code  
Model code  
Packaging code


Code elements highlighted in blue

Model	Power [W]	Packaging	Colour	Cable Type
<b>WE</b> <b>R3G</b> REG 3	<b>01</b> 120	<b>F</b> Foil sleeve	<b>916</b> White with grey ring	<b>W</b> Straight cable with plug
<b>R3T</b> REG 3 + T piece	<b>02</b> 200	<b>T</b> Tube	<b>SMA</b> Silver with grey ring	<b>P</b> Straight cable without plug
	<b>03</b> 300		<b>CRO</b> Silver with chrome ring	<b>U</b> Spiral cable with plug
	<b>04</b> 400		<b>905</b> Black with chrome ring	
	<b>06</b> 600			
	<b>08</b> 800			
	<b>10</b> 1000			
	<b>12</b> 1200			


# REG 3

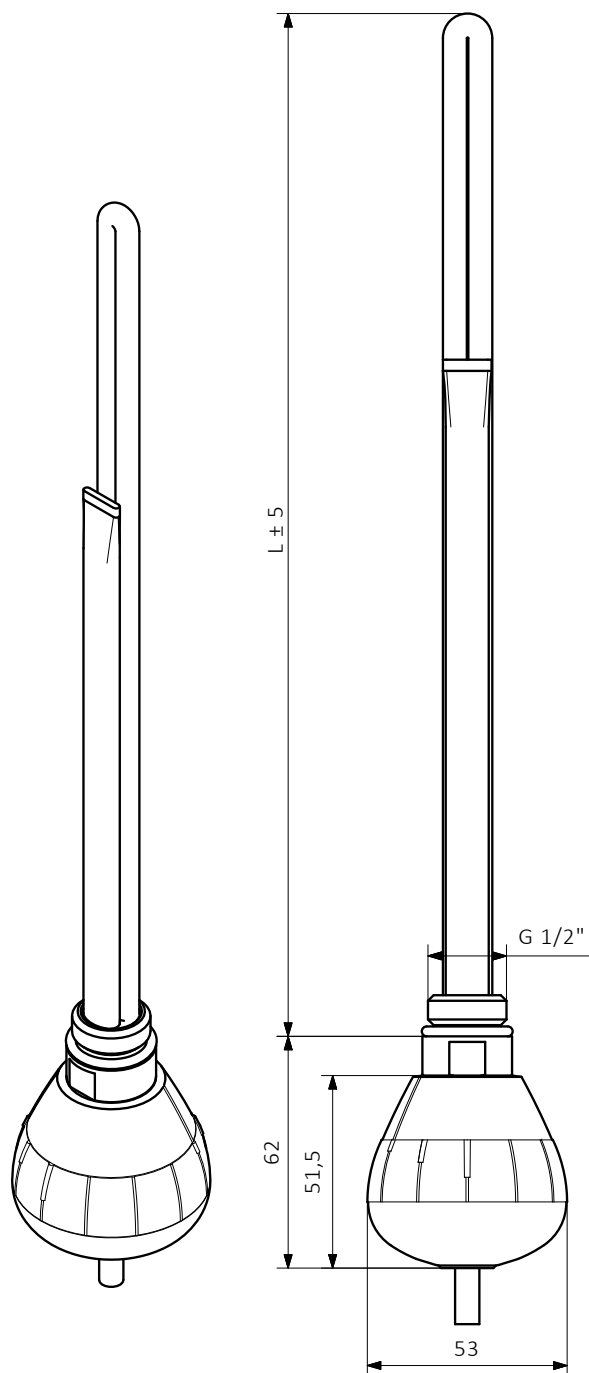


Straight cable without plug



Straight cable with plug



Spiral cable with plug

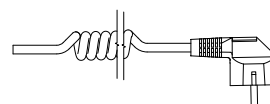

L [mm]	315	275	300	335	365	475	565	660
Power [W]	120	200	300	400	600	800	1000	1200